Quality...Reliability...Value...

LCS3240

32 INCH ENHANCED DEFINITION PROFESSIONAL GRADE LCD MONITOR
-with RS232C and integrated audio amplifier

LCS3240 SPECIFICATIONS

The LCS3240 is a professional grade LCD monitor designed for public display, digital signage, financial, broadcast, entertainment and transportation applications. The LCS3240 features full metal construction, integrated audio amplifier, 1366 x 768 native resolution, extremely fast 6.5ms response time for crystal clear video performance and RS232C for external control.

With its slim design, super wide viewing angle, high color saturation and color accuracy, low power consumption and long service life the LCS3240 is the perfect choice for your next project.

Features

- Durable Metal Construction
- Picture in Picture, Picture and Picture
- Fanless Design for Quiet Operation
- Anti-Reflective Coated LCD panels
- 176+ Degree H / V Viewing Angle
- Infrared and RS232C Control
- VESA Mounting Hole Pattern
- Integrated Audio Amplifier
- One Year Parts & Labor Warranty
- Extended Warranties Available

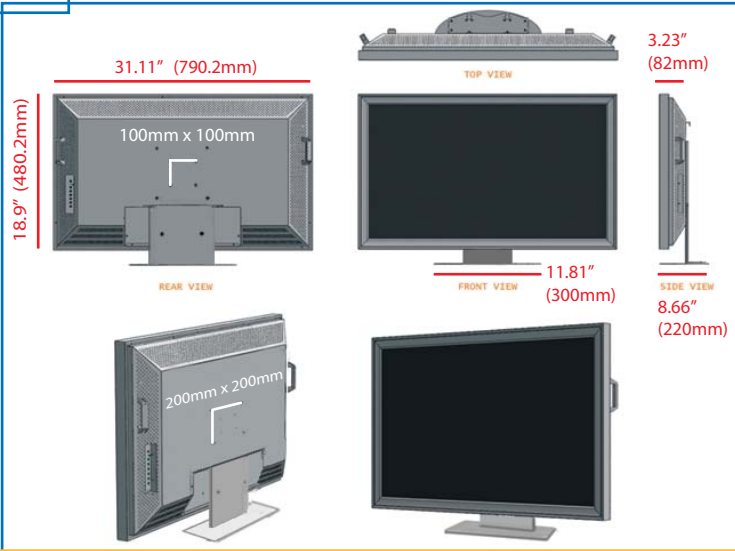

Specifications

Technology:	TFT LCD
Screen diagonal	32.02" (812.8 mm)
Screen area:	27.91" x 15.69" (708 x 398 mm)
Resolution:	1366 x 768
Brightness:	500 cd/m2
Contrast ratio:	1200:1
Colors:	16.7 million
Lifetime :	50,000h average
Color gamut:	76% NTSC
Aspect ratio:	16:9
Viewing angle:	176°/176°
Response time:	6.5ms GtoG
Color Control:	3200K-9300K, User

Inputs:	DVI-D, VGA (D15), S-Video, Composite Video, Component video (YPbPr, YCbCr)
Resolutions Supported:	NTSC/PAL/SECAM , 720i/p, 1080i/p, XGA, WXGA, SXGA,
Control:	RS232C, RS485
Mounting:	VESA 100x100, 200x200mm
Voltage:	100 - 240V (50Hz-60Hz)
Power Consumption:	<180W (On) <22W Stand-By
Operating Temp:	41° to 104°F (5° to 40°C)
Op. Humidity:	20 - 80%

Compliance:	FCC, CE, cUL
Weight:	36.4lbs (16.5kg)
Gross Weight:	44.1lbs (20kg)

Included Accessories:
Power cord, D-SUB 15pin cable , DVI-D 24 pin cable S-VIDEO cable, Component Mini Din 8 pin cable, RCA cable, Remote control, User's manual

OPTIONS

- Tempered Glass
- Bottom or Side Speakers
- Open Frame Versions Available

OVIDEON, INC
www.ovideon.com
P.O. BOX 9219
info@ovideon.com
Aurora, Illinois 60598
ph: 630.236.9917

* Specifications subject to change without prior notification